

120/145 DLX

- Working height : 12.10 m to 14.50
- Platform height : 10.10 m to 12.50 m
- Lift capacity : 560 kg/4 people (120 DLX) - 450 kg/3 people (145 DLX)
- Diesel engine

4 x 4 x 2



MANIACCESS

CE



Master



STANDARD EQUIPMENT

- Oscillating axle
- Multi-axis tilt sensor
- Removable control station
- Roll out extending platform
- Automatic 4 wheel parking brake
- Hourmeter
- Kubota diesel engine (20 hp-30 hp for 145 DLX)
- 4 wheel drive with high torque power package
- Flashing light



Rugged performance

Tackle Rough Terrain Jobsites

All MANIACCESS rough terrain models feature full-time four wheel drive, with high torque on demand. An oscillating rear axle combined with a generous 28.6 cm ground clearance give rough terrain models full-range terrain capability.



your working space.



Simplified Service

All mechanical and electrical components of the MANIACCESS rough terrain are easily accessible without raising the platform. Base controls and switches are grouped in a single control panel, and all hydraulics are configured in a single block.

Components are logically grouped and wiring is color coded and numbered to simplify service.



Convenient Controls with adjustable mount

The remote, removable control station features a fully proportional joystick control and a single switch selector for drive and lift functions. Steering control is mounted in the top of the joystick for easy one-handed operation. Adjustable mount allows the control to be positioned for maximum comfort.



120 DLX/145 DLX



Load capacity

120 DLX560 kg including 4 people
145 DLX450 kg including 3 people

Capacity on extension

120 DLX225 kg including 1 person
145 DLX180 kg including 1 person



Working height

120 DLX12.10 m
145 DLX14.50 m

Platform floor height

120 DLX10.10 m
145 DLX12.50 m



Overall length3.66 m

Overall width2.31 m

Overall height :

120 DLX2.70 m

145 DLX2.97 m

Platform size3.35 m x 1.88 m

Platform extension size1.20 m

Ground clearance28.6 cm

Turning radius :

Inside1.85 m

Outside4.78 m



Diesel engine20 hp (145 DLX : 30 hp)



Travel speed0 to 3.2 km/h
(145 DLX : 0 to 4 km/h)

Lifting time35 s



Gradeability40%
Max. slope accepted4°



TyresExtra Trac Terra 31"x15.5x15"
4 wheel drive
Front wheel steering




Weigh

120 DLX3511 kg

145 DLX4366 kg

Optional Features

- Hydraulic outriggers (model DLX S)
- 220V outlet at platform
- Airline to the platform
- All motion alarm
- Working lights

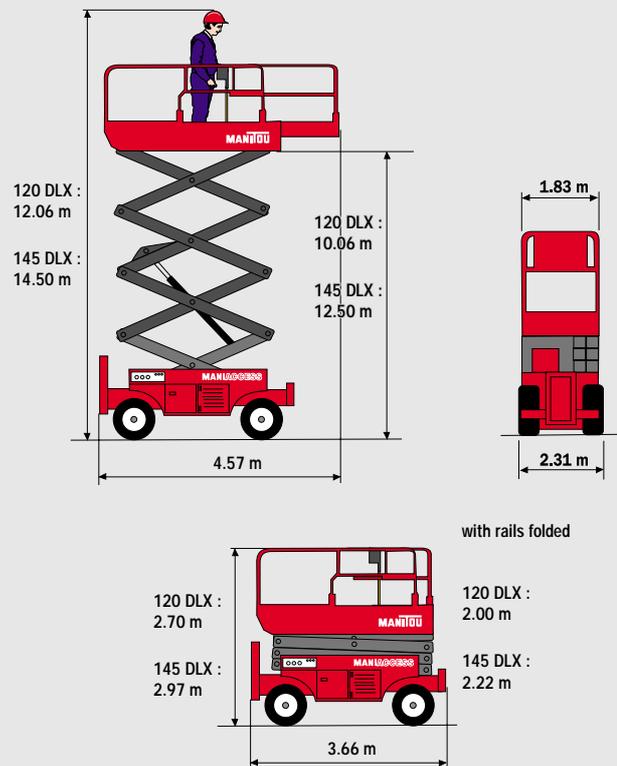

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice. The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments



MANITOU B.F. S.A.
B.P. 249 - 44158 ANCENIS CEDEX - FRANCE
TEL : 33 2 40 09 10 11
EXPORT DEPARTMENT FAX : 33 2 40 09 10 97
www.manitou.com